





UPLIGHTER | MODULED

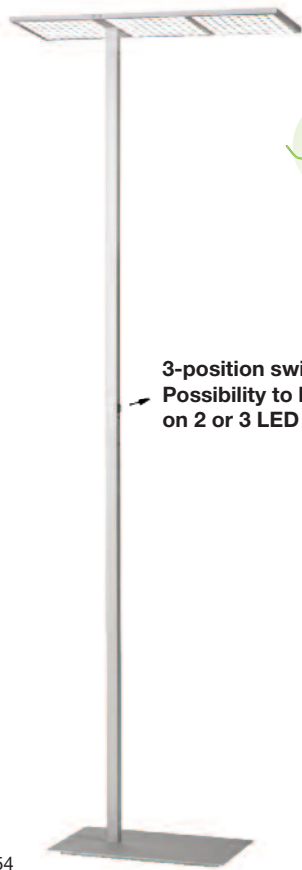

3-position switch:
Possibility to light on 2 or 3 LED plates

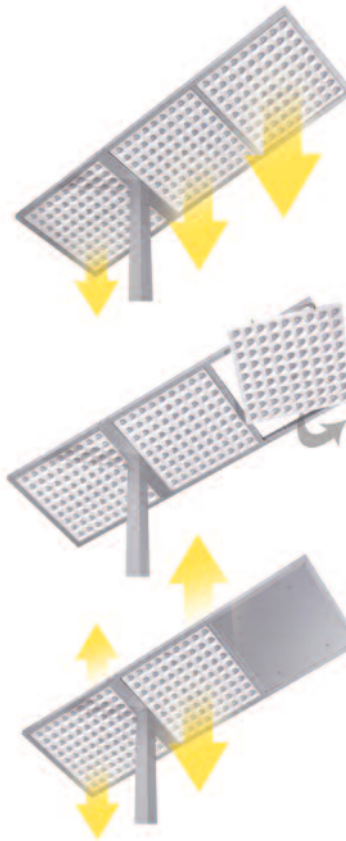

Direct lighting

Each LED plate can be easily and quickly clipped or unclipped

Direct / indirect lighting

Ref. with clamp: 400032354
Ref. with base: 400032355

MODULED

Adjustable LED uplighter, clever, discreet and economical.

Equipped with 3 LED plates separately movable thanks to a very easy clipping system, allowing a direct or direct / indirect lighting according to your needs.


3-position switch on the post:
off, 2 or 3 LED plates turned on.

Very pleasant lighting, bringing no danger to the eyesight:
Colour temperature : 4000 Kelvin

Materials: Aluminium + cast iron

3 plates of power LEDs
Maximum power consumption 34 W

Luminous flux: 1950 Lumen
Luminous efficacy : 57 lm/W
Lifetime: 40 000 h
Colour temperature 4000 K
Colour Rendering Index (CRI): > 85

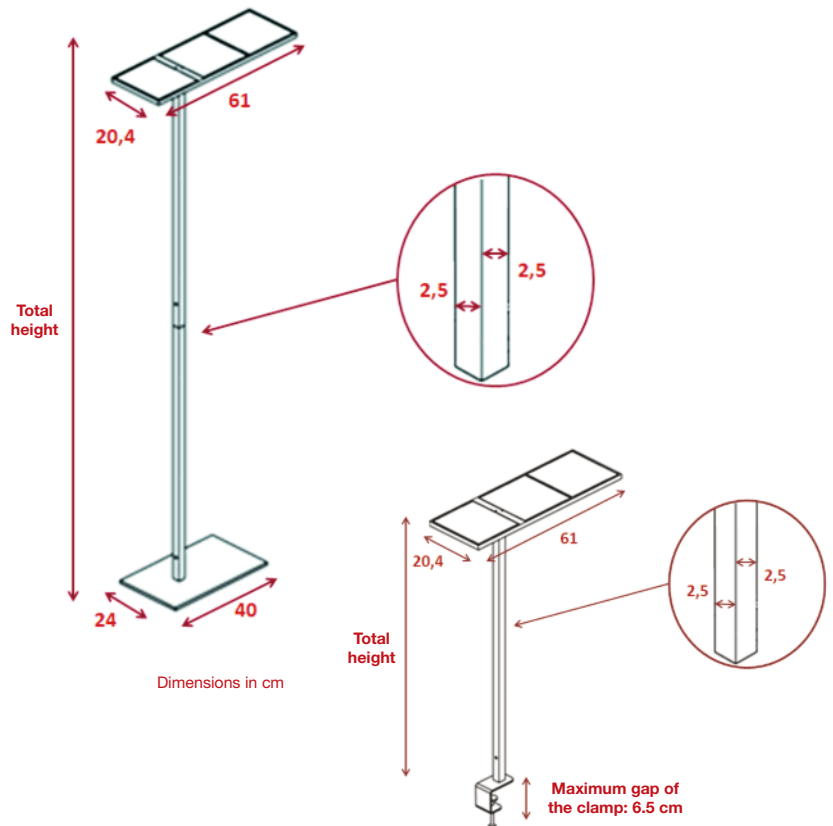

RoHS



Warranty 1 year